





Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life. This lawn lamp series uses LED. High efficiency constant current driver, ensure the light source is maximum used.

**FIELDS OF APPLICATION**


Outdoor Areas landscape design

IEC 62717 LED-modules for general lighting – Performance requirements  
IEC 62722-2-1 Particular requirements for LED luminaires

High Lumen Efficacy 115lm/w  
Body - Die cast extruded aluminum  
Diffuser - Polycarbonate  
Glowing Wire Test - 650°  
Temperature - ta=20 °C ~ ta max=50 °C  
Class - I

Optional optical diffusers -  Clear  Frosted

Model --- **1811**

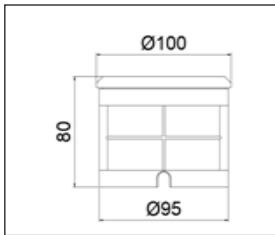

A-100-60H

Default Available

**00 000 00 0 00**



Product Assistant Chart



**1811**

Size	A				[ ]	
Driver	0	1	2	3	4	[ ]
	On/OffDali	Dimmable	Phase Dimming	1-10'		
Beam Angle (Lumen/W)	10 18 24			[ ]		
Kelvin	27	30	40	50	[ ]	
	2700K	3000K	4000K	5000K		
Finishing	SS				[ ]	
	Stainless Steel					
Wattage	3	5	[ ]			



Lighting Customization Solution can offer you modifications for environment with higher options as a customized product.

IP 67    IK 08    COB    McA Step 3    24V    220V

**Relative spectral perception of brightness and melanopic effect**  
Effect as a percentage

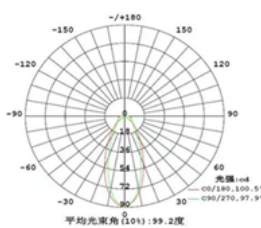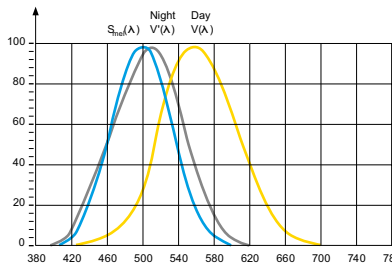

Explanation of the three curves:  
V(A) = Perception of brightness, daytime seeing with the cones  
V'(A) = Night-time seeing with the rods  
S<sub>m</sub>(A) = Melatonin suppression with the photosensitive ganglion cells

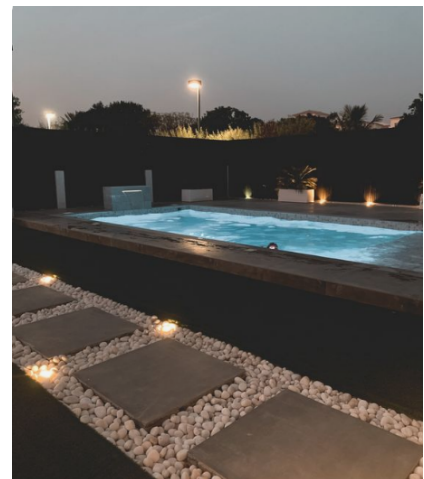

LED life time		Operating time 1,000 h										
Lamp Lumen Maintenance Factor		1	10	20	30	40	50	60	70	80	90	100
Lamp Survival Factor		1	1	1	1	1	1	1	1	0.99	0.99	0.99
L80	50,000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.98
L80	100,000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99

