



Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life. This lawn lamp series uses LED. High efficiency constant current driver, ensure the light source is maximum used.

FIELDS OF APPLICATION


Office & Education, offices, open-plan offices, conference rooms, conference rooms, reception areas, counters, galleries, hotels, restaurants, living spaces

IEC 62717 LED-modules for general lighting – Performance requirements IEC 62722-2-1 Particular requirements for LED luminaires

High Lumen Efficacy 115lm/W
 Body - Die cast aluminum housing with solvent free powder coating
 Diffuser - PMMA polycarbonate pattern lens.
 Glowing Wire Test - 850°
 Temperature - ta=20 °C ~ ta max=50 °C
 Class - III

Model --- FURAT1

7 years Standard Guarantee
Guarantee

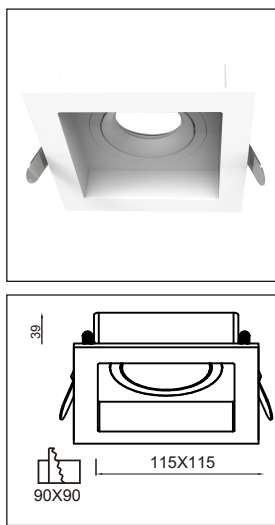

Default Available

FURAT1-A-0-15-27-W-6W-IP20




Product Assistant Chart

FURAT1	X	X	X	X	X								
					Size	A	B	C	D				
					Driver	0	1	2	3	4	5		
						On/Off	Dali	Dimmable	Phase Dimming	1-10	0-10		
					Beam Angle	15°	24°	36°	36°				
					Kelvin	27	30	40	50	60			
						2700K	3000K	4000K	5000K	6000K	RGBW	TUN	
					Finishing	W		B					
						white		black					
					Wattage	4W	6W	8W	10W	12W	15W	18W	20W

- A - Ø 105-80mm**
- B - Ø 105-92mm**
- C - Ø 105-110mm**
- D - Ø 105-125mm**


Lighting Customization Solution can offer you modifications for environment with higher options as a customized product.

IP-20 IP-44 COB McA Step 3 220~240V







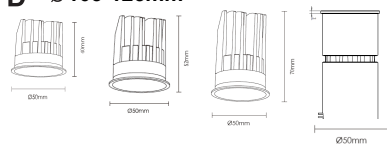


Relative spectral perception of brightness and melanopic effect

Effect as a percentage

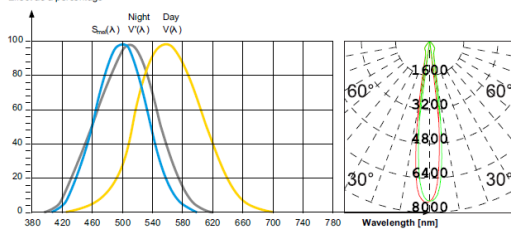

Explanation of the three curves:
 V(λ) = Perception of brightness, daytime seeing with the cones
 V'(λ) = Nighttime seeing with the rods
 Saa(λ) = Melatonin suppression with the photosensitive ganglion cells



LED life time		Operating time 1.000 h											
Lamp Lumen Maintenance Factor	Lamp Survival Factor	1	10	20	30	40	50	60	70	80	90	100	
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.60	
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.98	
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99



LED

CRP-90

series wiring



LM-80



FLICKER FREE